

Turning Keypad Lights On/Off

The *CapTel* 840i dialing keypad is lit to make it easier to see the number keys. The lights on the number keypad can be turned off in the *CapTel* Options menu. When Keypad Lights Timeout is selected, the lights on the number keypad go off automatically after approximately 60 seconds of non-use.

To turn the lights on the number keypad off:



1. With the handset hung up, press the **YES** button to see the Options menu.






2. Press the **DOWN** arrow button until **Settings** is highlighted. Press the **YES** button to select.



3. Press the **DOWN** arrow button to highlight **Phone Settings**. Press the **YES** button to select.



4. Press the **DOWN** arrow button repeatedly until **Keypad Lights** is highlighted. Press the **YES** button to select.

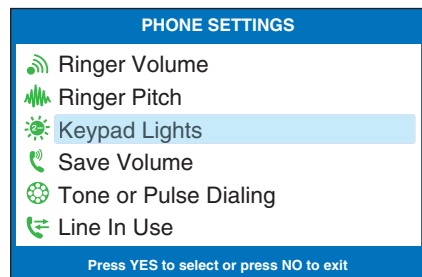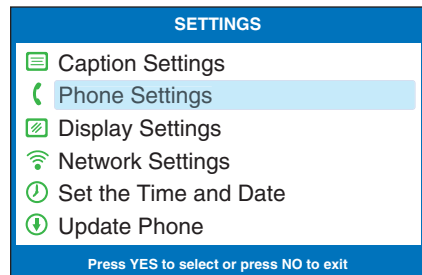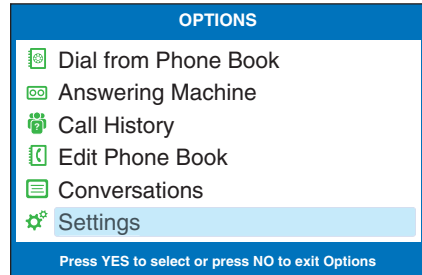



5. Press the **UP** or **DOWN** arrow button to turn Keypad Lights Always On or Keypad Lights Timeout.

NOTE: *When Keypad Lights Timeout is selected, the dialing keypad lights will go off whenever the display is blank (after approximately 60 seconds of non-use). The lights will remain on when the phone is in use.*



6. Press the **YES** button to select your option, or press the **NO** button to exit.



7. Press the **NO** button repeatedly to exit out of the Options menu.

NOTE: *The CapTel display screen typically stays on whenever you have new answering machine messages that have not been reviewed. If you set Keypad Light Timeout, however, the CapTel display screen will also turn off after approximately 60 seconds of non-use.*

